



Engobe applicator developed for **medium/small formats**. Uniform application of refractory engobe under tiles is an essential requirement to maintain the condition of ceramic rollers and the physical qualities of production.

Uniform and accurate in time engobe application.
No needs for operator to adjust the quantity of product applied, therefore no more differences
T in adjustments in between shifts.



Possibility to print **logos** or "**Made in...**" writing using laser engraving.

MADE IN ITALY	
\approx	



Q

No more defects of **refractory drops** and **dotting** on surface, thanks to the application through engraved silicone rollers.





Benefits of **planarity** or **deformation** visible at reflection, especially in glossy production.



Longer cleanliness state of kiln rollers: increase of monthly hours at full kiln, reduction of fixed and maintenance costs. 5



Outstanding simplicity of the machine and easy installation on the existing line frame without major modification.









The outstanding results and performance delivered by **ROLL1** to costumers using it on medium/large production, led us to develop a new machine for smaller size production based on the same concept.

ROLL-X is the new engobe applicator especially developed for medium/small production, easy to install, it allows to obtain a uniform application of refractory engobe under tiles, an essential requirement to maintain the condition of ceramic rollers and the physical qualities of production.


The laser engraving of **ROLLERFLEX D.145** can be customized according to client's need, enabling logos and writing as well as dosing the product applied on tiles having back pattern particularly smooth or not so marked.

The machine is equipped with **ROLLERFLEX** diameter 145 mm, silicone roll laser engraved, super soft to follow any tiles curvature for even application.

Optionals:

的

Connection nibs to ROLL-X (2/4/6/8 BELTS). Nibs of connection between transport line belts and ROLL-X machine. Automatic speed adjustment of the rollers following the glazing line.

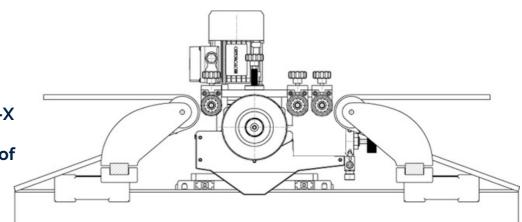

ROLL-X CONFIGURATION			
MODEL	SILICONE ROLLER LENGHT [m	nm] NOMINAL SIZE FORMAT [mm]	
ROLLX-720	723	300-500	
ROLLX-1020	1.023	300-800	
ROLLX-1320	1.323	300-1000	
ROLLX-1600	1.600	300-1200	
ASSOCIATO	HEAD OFFI	CE WAREHOUSE AND LOGISTIC	
ACIMAC MEMBER Inter	orldwide Phone: +39 0161	Č), Italy 41049 Sassuolo (MO), Italy 218860	

E-mail: interser@interser.it